




Durable Bar Code Solutions

www.camcode.com

Product: Metalphoto Foil Label

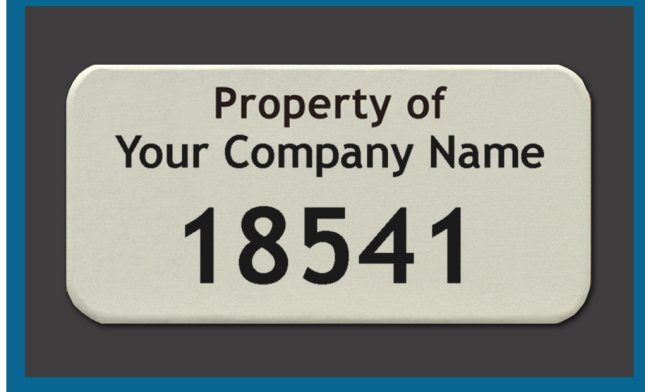


Product Features

- Exceptional durability, image is sealed beneath the surface, superior resistance to chemicals, abrasion, solvents, extreme temperatures and UV.
- 5.0 mil 3M adhesive - better than any plastic choices.
- Tamper evident.

Need Long-Lasting Asset Labels?

Description

Camcode's **Metalphoto® Foil** label is designed with superior quality for the most demanding asset tracking applications. This label is constructed of a 3.0 mil anodized (5.0 mil optional) aluminum face stock, with a 5.0 mil high performance permanent pressure-sensitive adhesive. The adhesive is designed to permanently bond to high surface energy metals and plastics, and textured and contoured surfaces. The label has excellent resistance to chemicals, abrasion, solvents; and will withstand exterior exposure in the harshest environments, including extreme cold, heat and UV. When treated with our image intensification process, Metalphoto's expected exterior life exceeds 20 years.

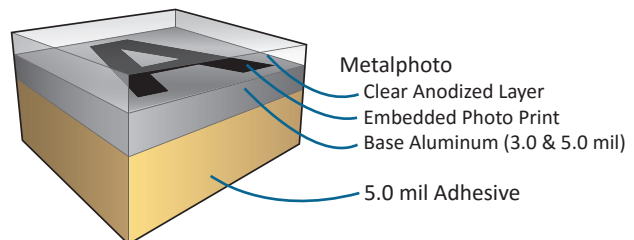

Product Specifications

- Material** 3.0 mil (5.0 mil optional) aluminum face stock.
- Adhesive** 5.0 mil permanent pressure-sensitive adhesive (also available with low surface energy adhesive).
- Label Copy** Several font types are available as well as logos or other design elements.
- Symbologies** All common symbologies available including code 3 of 9, I2 of 5, 128 and Data matrix.
- Colors** Black graphics on silver background; color options available.
- Standard Sizes** Four standard sizes: 1.50" x .50" – 1.50" x .75" – 2.00" x .75" – 2.00" x 1.00" . See price list for color options and part numbers. Custom sizes available.
- Packaging** Shipped in packaged sheets, matrices removed, packages marked by number sequence, in boxes. 100% no missing numbers.
- Shipment** 10 working days from receipt of order and approval of artwork. Expedited shipment is available for an additional charge.

Metalphoto® Foil Labels

Durability Characteristics

PRODUCT DATA	VALUE	TEST METHOD
Exterior Exposure	No Effect	Using Metalphoto Image Intensification Process, black and silver image exceeds 400 hr. Weatherometer est GG-P-455b, estimated equivalent to 20 yr. exposure
Abrasion Resistance	Slight dulling of surface	Taber Abraser with CS17 wheel, a total of 1000 gm. load 7000 cycles
Temperature Resistance	650°F	Using Metalphoto Image Intensification Process
Salt Spray	No Corrosion	5% at 95°F for 700 hrs.
Chemical Resistance		
MIL-S-3136 111 Hydrocarbon Fluid	No Effect	1 hr. immersion
MIL-L-5161C-Turbine and jet engine fuel	No Effect	1 hr. immersion
JP-4 Fuel	No Effect	72 hr. immersion
Kerosene	No Effect	12 hr. immersion
Skydrol (Hydraulic Fluid)	No Effect	24 hr. immersion at both room temp. and boiling point
Methyl Ethyl Ketone (MEK)	No Effect	24 hr. immersion
Ethyl Acetate	No Effect	24 hr. immersion
Xylol	No Effect	72 hr. immersion
Heptane	No Effect	72 hr. immersion
Ethyl Alcohol	No Effect	72 hr. immersion
Ferric Chloride	No Effect	10% solution, 16 hr. immersion
Ammonium Hydroxide	Slight Dulling	10% solution, 16 hr. immersion
MIL-P-21563 soap solution	No Effect	16 hr. immersion
MIL-C-25179 AIN in heptane	No Effect	25% solution, 1 min. immersion (cleaning solution)
Sulfuric Acid	No Effect	10% solution, 24 hr. immersion
Phosphoric Acid	No Effect	1% solution, 12 hr. immersion
Nitric Acid	No Effect	3% solution, 72 hr. immersion
TSP (Trisodium Phosphate)	No Effect	1% solution, 40 hr. immersion
Sodium Hydroxide	Not Recommended (<i>surface attack</i>)	1% solution, 1 hr. immersion

SPECIFICATION	PUBLICATION	DETAIL	DESCRIPTION
GG-P-455b	Federal Specification	Type I, Grade A or B Class 1 & 2	Photosensitive anodized aluminum impregnated with silver compounds printable on one or two sides - all finishes and thicknesses.
MIL-P-15024F	Military Specification	Type H & G	Totally anodized aluminum with characters integrated into the anodized layer photographically using silver compounds.
MIL-P-19834C	Military Specification	Type I or II Style III or IV	Metalphoto .003" thick plates with the proper adhesive applied meets or exceeds all of the performance requirements of this spec.
A-A-50271	Military Specification	Composition C	Photosensitive aluminum plates, grade and class as specified in federal specification GG-P-455b.
Industrial Commercial Products	Original Equipment Panel Fronts Nameplates	Metalphoto Products	Material shall be Metalphoto. Image (black on silver or silver on black shall be sealed into the anodized layer with photosensitive silver compounds) colors other than black may be imbedded by resist or screen process.

Metalphoto® and Camcode® are registered trademarks or Horizons Incorporated.

Note: Users must test products in the specific environment anticipated.

Camcode does not warrant performance of its materials in any environment.



www.camcode.com
 18531 South Miles Road, Cleveland, Ohio 44128
 800.627.3917 fax: 216.587.4719 customer_service@camcode.com
 Camcode® and Metalphoto® are Registered Trademarks of Horizons Incorporated